21.5”, 24”
6 Sides Full IP65 Stainless Touch Monitor



Features

- Fanless and rugged design
- 5 Wires Resistive touch solution
- Resolution 1920 x 1080
- Full 304 IP65 6 sides stainless chassis
- VESA mount & Yoke mount



Specifications


Model No.	WM215RS03	WM215RS04	WM240RS03	WM240RS04
DISPLAY				
Size	21.5" TFT (16:9)		24" TFT (16:9)	
Resolution	1920 x 1080		1920 x 1080	
Colors	16.7 M		16.7 M	
Luminance	300 cd/m2		250 cd/m2	
Contrast Ratio	3000:1		1000:1	
View Angle (H/V)	178°/178°		173°/165°	
HIGH BRIGHTNESS (OPTIONAL)				
Resolution	1920 x 1080		1920 x 1080	
Colors	16.7M		16.7M	
Luminance	1000 cd/m2		1000 cd/m2	
Contrast Ratio	3000:1		1000:1	
Viewing Angle (H/V)	178°/178°		173°/165°	
I/O PORTS				
VGA	V	V	V	V
HDMI		V		V
USB (for touch screen)	V	V	V	V
POWER REQUIREMENT				
Power Requirement	DC in 12V (60W)			
TOUCH SCREEN				
Touch Screen	5 Wires Resistive (one touch)			
OS SUPPORT				
OS support	Win Pro 10 / Embedded Win 7, 8, 10			
MECHANICAL & ENVIRONMENTAL				
Operation Temp.	0 ~ 45°C			
Storage Humidity	10 ~ 90%, non-condensing			
Mounting	VESA mount (100X100mm) & Yoke mount			
Dimension (WxHxD)	561 x 360 x 68 mm		620 x 400 x 57 mm	
Weight	9.3 kg		TBD	
OPTIONAL				
P/N: 2351215001	Full IP65 Waterproof Power adaptor with European power cord (132W / 90 ~ 295V AC input / 12V DC output)			
P/N: 2352415002	Full IP65 Waterproof Power adaptor with European power cord (150W / 90 ~ 295V AC input / 24V DC output)			
P/N: 2351215002	Full IP65 Waterproof Power adaptor with US power cord (132W / 90 ~ 295V AC input / 12V DC output)			
P/N: 2352415003	Full IP65 Waterproof Power adaptor with US power cord (150W / 90 ~ 295V AC input / 24V DC output)			
P/N: 2320000001	Optical Bonding			
P/N: 309M106004	DC in 9V ~ 36V			
P/N: 3120600002	RS232 touch screen			

ORDERING INFORMATION	
STANDARD	
WM215RS03	21.5” full IP65 Display, 5 wires resistive, 1 x VGA, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, 1 x DC in external power adapter
WM215RS04	21.5” full IP65 Display, 5 wires resistive, 1 x VGA, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 2m HDMI cable, 1 x 1.8m USB cable, 1 x DC in external power adapter
WM240RS03	24” full IP65 Display, 5 wires resistive, 1 x VGA, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, 1 x DC in external power adapter
WM240RS04	24” full IP65 Display, 5 wires resistive, 1 x VGA, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 2m HDMI cable, 1 x 1.8m USB cable, 1 x DC in external power adapter
HIGH BRIGHTNESS	
WM215RJ03	21.5” full IP65 Display, 5 wires resistive, 1 x VGA, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, 1 x DC in external power adapter, 1000 cd/m2
WM215RJ04	21.5” full IP65 Display, 5 wires resistive, 1 x VGA, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 2m HDMI cable, 1 x 1.8m USB cable, 1 x DC in external power adapter, 1000 cd/m2
WM240RJ03	24” full IP65 Display, 5 wires resistive, 1 x VGA, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, 1 x DC in external power adapter, 1000 cd/m2
WM240RJ04	24” full IP65 Display, 5 wires resistive, 1 x VGA, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 2m HDMI cable, 1 x 1.8m USB cable, 1 x DC in external power adapter, 1000 cd/m2


Dimensions

Unit : mm


WM215RS03

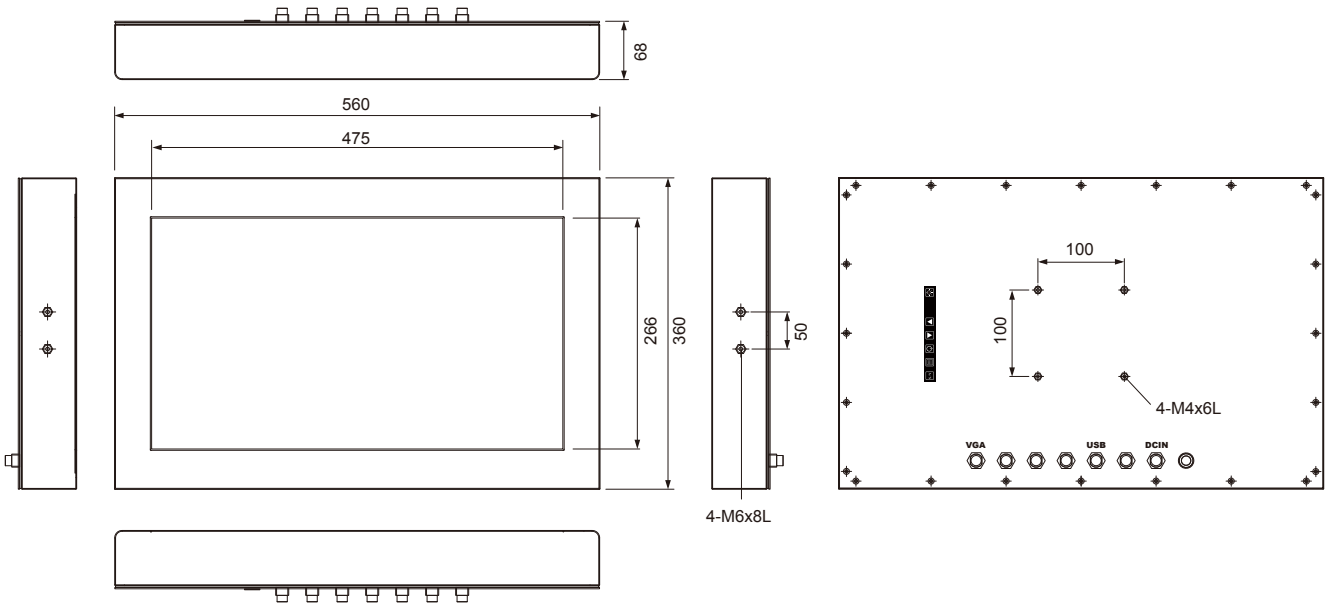


WM215RS04

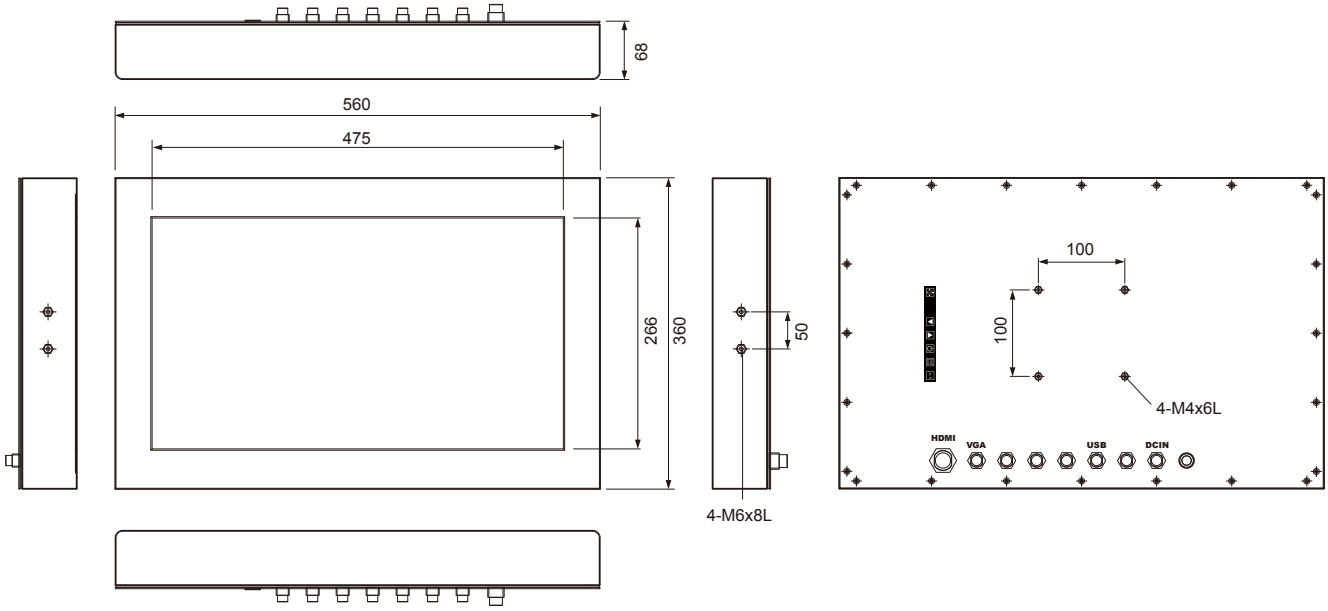

WM240RS03

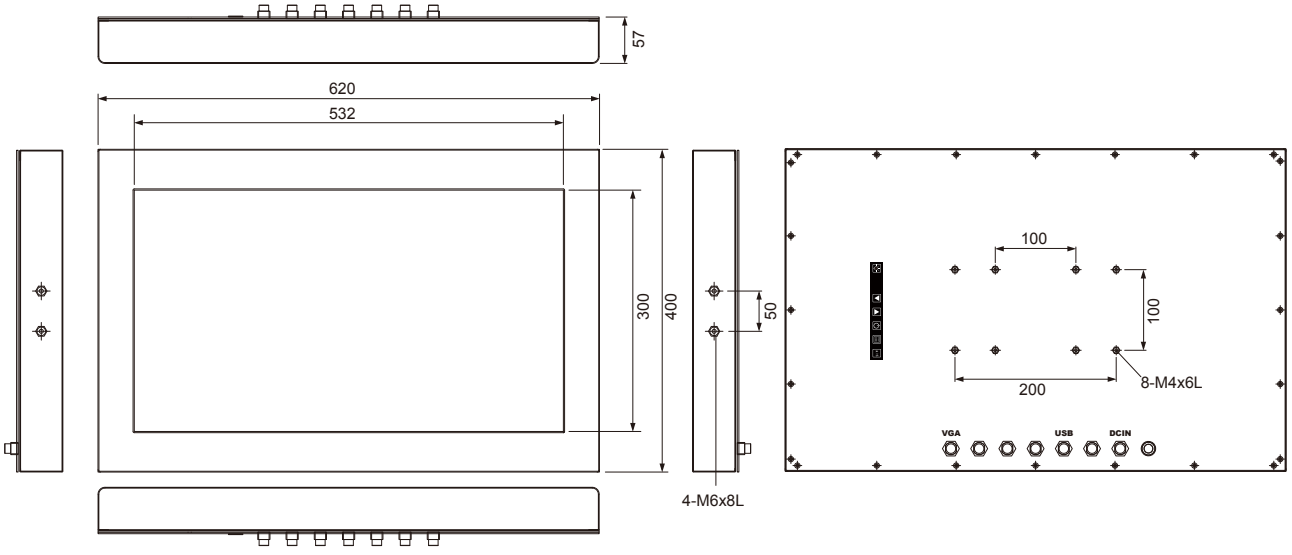

WM240RS04

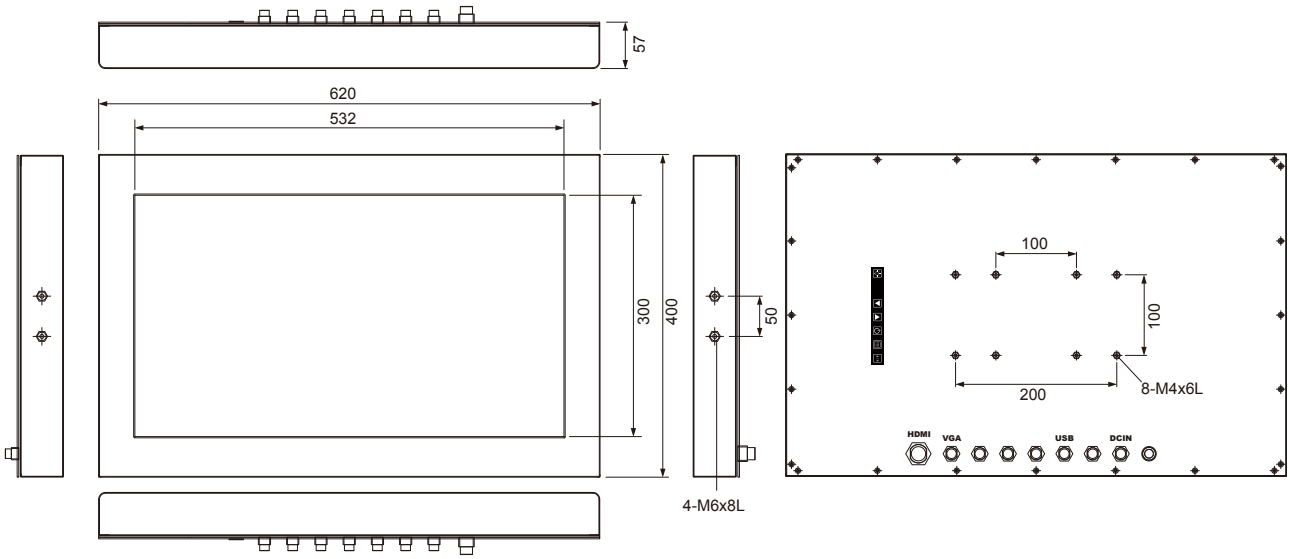

**Specifications are subject to change without notice.*